
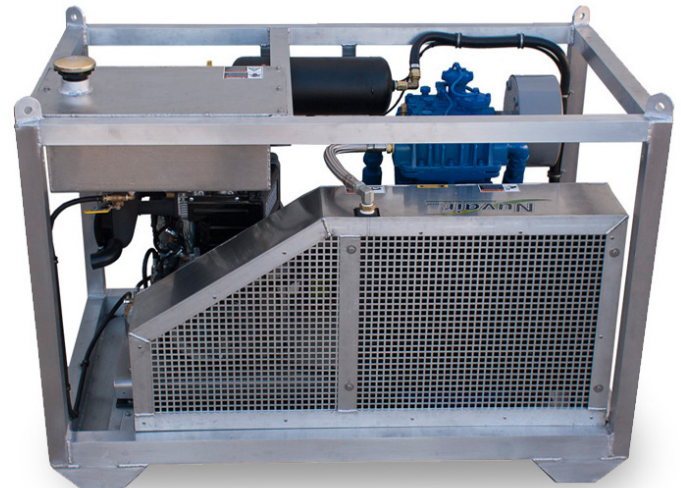


As an industry leader, the Quincy 370 Low Pressure Compressor has loadless start and head unloaders. The Kohler 28.5 hp diesel engine features electric start, tach / hour meter, battery in a battery box and a 10-gallon fuel tank with a sight gauge and filter.

This package has a 3-gallon surge tank with 3 outlet manifold, over pressure valve, drain valve, large air after cooler, check valve, gate valves and plumbing. The frame is made from 6061 aluminum with four lifting eyes and an enclosed bottom. All equipment is inset within the lifting frame and mounted to a ¼ in stainless steel plate.

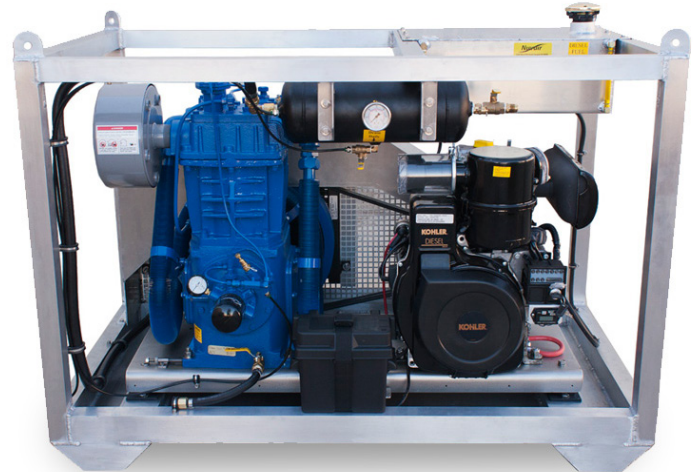

FEATURES

- High quality two-stage pressure lubricated pump
- LV head unloader - loadless start
- Simple to operate, reliable and versatile
- 4 point lifting eyes

OPTIONS

- Honda gas engine or electric motor in any volt and 50 or 60 Hz
- Low pressure regulator for downstream pressure control
- Low pressure alarm
- CO, CO₂, Moisture, and O₂ Analyzers
- Audible and visual high temp alarm
- Low oil shutdown
- High temp shutdown
- Breathing air filtration
- ASME rated 30-gallon or larger volume tank
- 250 psi

SPECIFICATIONS

SKU: Q-370D	
Flow Rate	49 CFM @ 175 psi (1387 L/min @ 12 bar)
Engine	28.5 Kohler diesel
Max Operating Pressure	175 psi (250 psi on request)
Number of Stages	2
Dimensions (L x W x H)	60 x 35 x 44 in (152 x 89 x 112 cm)
Weight	1030 lbs (467 kg)
Lubrication	Pressure
Air Quality	Grade D breathing air (with breathing air filtration option)